

Dia AH Flormat Japan

Non-slip mats that present a lawn-like look

This is the basic type of mat developed using 100% vinyl resin.

This durable material offers weather-resistance that remains unchanged throughout seasonal temperature fluctuations, and stays supple and flexible at all times.

It demonstrates effectiveness in absorbing sound and vibration in concrete passageways.

Flame-retardancy testing registration: EO 820383

Material: 100% Vinyl

Thickness: 3.5mm ± 10%

Size: 1m x 10m


Colour: Black, Grey, Brown, Blue, Green, & Red

Application:

Changing Rooms,
Shower Area, Swimming Pool,
Spa, Bathrooms, Staircase

Test Results of Quality & Performance of Dia Mat

Item	Results	Method
Impression	2.54 mm (20 degrees) 2.67 mm (40 degrees)	JIS A5707
Residual Impression	1.10 mm	JIS A5707
Rate of Change Dimension	Vertical 0.2% (Average) Horizontal 0.2% (Average)	JIS K6734 (70 +/- 2 Degree C, 24 Hour treatment)
Slippage	0.46 Slippage Resistance Coefficient	JIS A5707
Discolouration	Class 5 Illumination Hours: 200 hours	JIS A5707
Abrasion Resistance	0.047 (G/100 Times)	JIS A7204
Chemical Resistance	No Faults- Reagent Name: Soya Bean Oil Lubrication Oil: 95% ethyl alcohol, 2% Caustic Soda, 5% Acetic Acid, 5% Hydrochloric Acid	JIS A5707

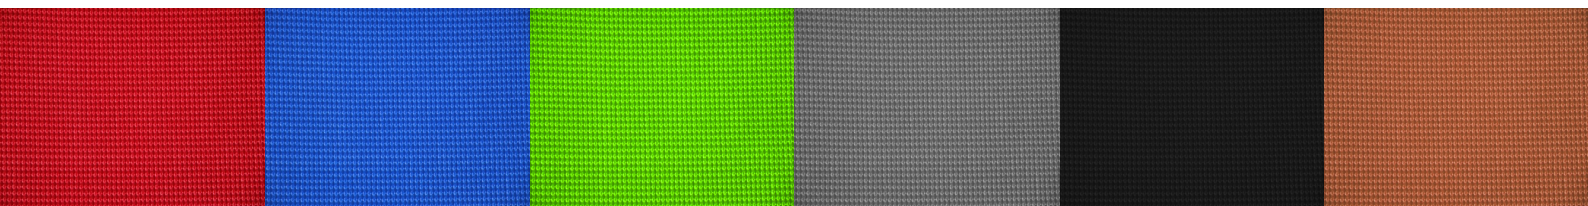

Red

Blue

Green

Grey

Black

Brown